BATTERY DATA SHEET







MF | MAINTENANCE FREE

REF BT12A-BS



VOLTAGE - v CCA - A 0.5Ah VOLTAGE - Ah (20Hr)

TECHNOLOGY

- AGM construction (absorbed acid)
- VRLA battery (Valve Regulated Lead Acid)
- Supplied with a separate acid pack
- Homologated by OEM


FEATURES

- Upright installation only
- Maintenance free (no water refilling)
- Sealed after filling, no gas emission through venting hole (under normal operation)
- High power
- Does not need to be recharged while stocked
- Suitable for cold weather
- Reduction of plate sulfation
- Higher life cycle (up to three times longer than conventional batteries)
- Longer voltage hold

DIMENSIONS

Length (A): Width (B): Container height: Total height (C):

150±2mm (5.91in) 88±2mm (3.46in) 105±2mm (4.13in) 105±2mm (4.13in)

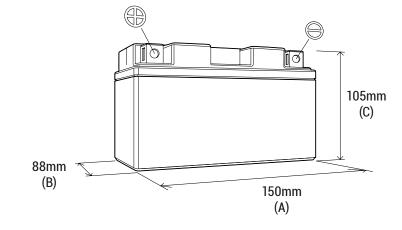

TERMINALS

9.0

SIDE


UPGRADE FOR


WEIGHT

Battery (with acid):

Approx 3.32kg (7.31lbs)

MOUNTING ANGLE

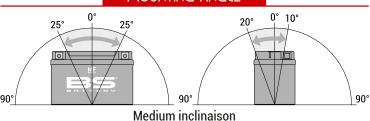



FRONT

--13.2-

6.5