

# SLA

FACTORY ACTIVATED

SLA | READY TO START

REF **12N5.5-4A**



**12V** VOLTAGE - V

**70A** CCA - A

**5.8Ah** CAPACITY - Ah (20Hr)

**5.5Ah** CAPACITY - Ah (10Hr)

## TECHNOLOGY

- Designed according to AGM technology (Absorbed acid)
- VRLA battery type
- Activated and pre-charged batteries
- Homologated by OEM

## FEATURES


- AGM construction (Absorbed Glass Material)
- VRLA battery (Valve Regulated Lead Acid)
- Factory activated
- Environmentally friendly, spillproof design
- Multi-positional fitment
- Absolutely Maintenance free
- Sealed, no gas emission through venting hole (under normal operation)
- Ready & Easy to use
- No acid handling - Very safe
- Increased power & Extended life
- Extreme vibration resistance

## UPGRADE FOR

## WEIGHT


Battery (with acid) : Approx 2.31kg (5.09lbs)

## MOUNTING ANGLE

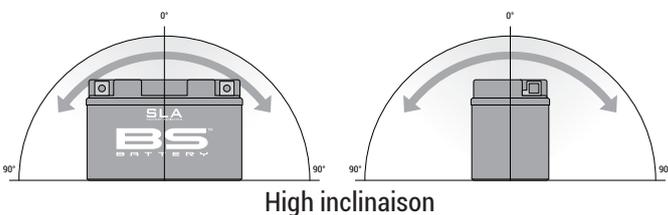

## DIMENSIONS

Length (A) : 135±2mm (5.31in)  
 Width (B) : 60±2mm (2.36in)  
 Container height : 130±2mm (5.12in)  
 Total height (C) : 130±2mm (5.12in)

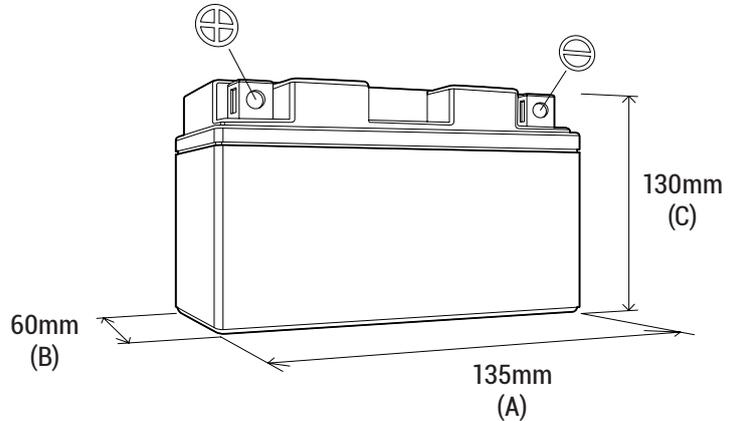

## TERMINALS

